


Linsensenk- schrauben m. Schlitz Messing

Slotted raised countersunk
(oval) head screws
Vis à tête goutte de suif,
avec fente, en laiton

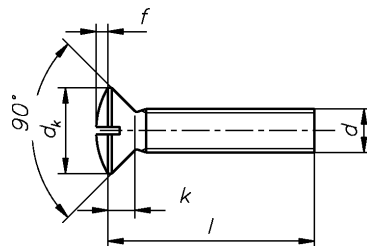

DIN 964 DIN-EN-ISO 2010

d	M 3	M 4	M 5	M 6	M 8
dk	5,6	7,5	9,2	11	14,5
k	1,65	2,2	2,5	3	4
f	0,75	1	1,25	1,5	2


WGR 3135 000

d mm	l mm	Inhalt Stck	€ 100 Stck
M 3	6,0	100	3,16
M 3	8,0	100	3,16
M 3	10,0	100	2,84
M 3	12,0	100	2,96
M 3	16,0	100	3,36
M 3	20,0	100	3,84
M 3	25,0	100	4,28
M 3	30,0	100	5,76
M 3	35,0	100	7,08
M 3	40,0	100	8,32
M 3	45,0	100	10,52
M 3	50,0	100	15,96
M 4	6,0	100	3,72
M 4	8,0	100	3,72
M 4	10,0	100	4,08
M 4	12,0	100	4,16
M 4	16,0	100	4,88
M 4	20,0	100	5,68
M 4	25,0	100	6,08
M 4	30,0	100	7,04
M 4	35,0	100	7,92
M 4	40,0	100	8,56
M 4	45,0	100	11,04
M 4	50,0	100	11,88
M 4	55,0	100	19,04
M 4	60,0	100	20,32
M 4	80,0	100	22,80
M 5	6,0	100	5,84
M 5	8,0	100	5,84
M 5	10,0	100	5,96

d mm	l mm	Inhalt Stck	€ 100 Stck
M 5	12,0	100	6,12
M 5	16,0	100	7,08
M 5	20,0	100	7,72
M 5	25,0	100	8,64
M 5	30,0	100	10,00
M 5	35,0	100	13,40
M 5	40,0	100	14,00
M 5	45,0	100	15,44
M 5	50,0	100	16,08
M 5	60,0	50	20,80
M 5	70,0	50	25,52
M 5	80,0	50	31,60
M 5	90,0	50	65,44
M 5	100,0	50	75,96
M 6	8,0	100	8,04
M 6	10,0	100	8,04
M 6	12,0	100	9,08
M 6	16,0	100	10,32
M 6	20,0	100	11,40
M 6	25,0	100	12,08
M 6	30,0	100	14,44
M 6	35,0	100	16,36
M 6	40,0	100	17,76
M 6	45,0	50	20,84
M 6	50,0	50	21,92
M 6	60,0	50	27,36
M 6	70,0	25	32,48
M 6	80,0	25	34,92
M 6	90,0	25	75,60
M 6	100,0	25	91,00

**Linsensenk-
schrauben m.
Schlitz Messing**

Slotted raised countersunk
(oval) head screws
Vis à tête goutte de suif,
avec fente, en laiton

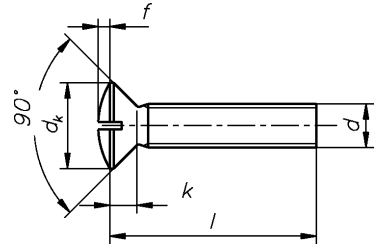

DIN 964 DIN-EN-ISO 2010

WGR 3135 000

d mm	l mm	Inhalt Stck	€ 100 Stck
M 8	16,0	100	23,00
M 8	20,0	100	24,56
M 8	25,0	50	26,16
M 8	30,0	50	29,68
M 8	35,0	50	31,84
M 8	40,0	50	33,96
M 8	45,0	50	39,04

d mm	l mm	Inhalt Stck	€ 100 Stck
M 8	50,0	25	42,68
M 8	55,0	25	67,52
M 8	60,0	25	74,76
M 8	70,0	25	85,04
M 8	80,0	25	100,88
M 8	90,0	25	108,56
M 8	100,0	25	118,88

WGR 3135

074 vernickelt • nickel-plated • nickelé


d mm	l mm	Inhalt Stck	€ 100 Stck
M 3	8,0	100	3,28
M 3	10,0	100	3,28
M 3	12,0	100	3,40
M 3	16,0	100	3,80
M 3	20,0	100	4,28
M 3	25,0	100	4,72
M 3	30,0	100	6,20
M 3	35,0	100	7,96
M 3	40,0	100	8,84
M 4	6,0	100	4,44
M 4	8,0	100	4,44
M 4	10,0	100	4,44
M 4	12,0	100	4,56
M 4	16,0	100	5,36
M 4	20,0	100	6,20
M 4	25,0	100	6,60
M 4	30,0	100	7,80
M 4	35,0	100	8,76
M 4	40,0	100	9,48
M 4	45,0	100	12,04
M 4	50,0	100	12,96

d mm	l mm	Inhalt Stck	€ 100 Stck
M 4	55,0	100	19,96
M 4	60,0	100	22,36
M 4	70,0	100	24,36
M 4	80,0	100	30,28
M 4	100,0	100	69,28
M 5	6,0	100	6,28
M 5	8,0	100	6,28
M 5	10,0	100	6,40
M 5	12,0	100	6,72
M 5	16,0	100	7,80
M 5	20,0	100	8,60
M 5	25,0	100	9,72
M 5	30,0	100	11,12
M 5	35,0	100	14,60
M 5	40,0	100	15,48
M 5	45,0	100	16,88
M 5	50,0	100	17,92
M 5	55,0	50	21,32
M 5	60,0	50	22,96
M 5	70,0	50	28,00
M 5	80,0	50	34,44

Linsensenk- schrauben m. Schlitz Messing

Slotted raised countersunk
(oval) head screws

Vis à tête goutte de suif,
avec fente, en laiton

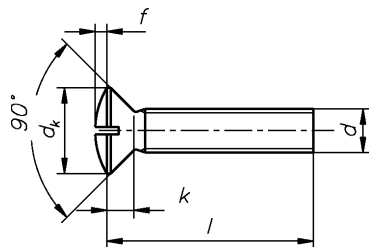

DIN 964 DIN-EN-ISO 2010

WGR 3135

074 vernickelt • nickel-plated • nickelé

d mm	l mm	Inhalt Stck	€ 100 Stck
M 5	90,0	50	64,12
M 5	100,0	50	75,96
M 6	10,0	100	8,76
M 6	12,0	100	9,96
M 6	16,0	100	11,32
M 6	20,0	100	12,68
M 6	25,0	100	13,60
M 6	30,0	100	16,20
M 6	35,0	100	18,36

d mm	l mm	Inhalt Stck	€ 100 Stck
M 6	40,0	100	20,00
M 6	45,0	50	23,36
M 6	50,0	50	24,40
M 6	60,0	50	30,48
M 6	70,0	25	36,12
M 6	80,0	25	39,08
M 6	90,0	25	73,36
M 6	100,0	25	82,28

WGR 3135

079 verchromt • chromium-plated • chromé

d mm	l mm	Inhalt Stck	€ 100 Stck
M 4	16,0	100	8,96
M 4	20,0	100	10,16
M 4	25,0	100	11,36
M 4	30,0	100	13,28
M 4	35,0	100	15,04
M 4	40,0	100	16,56
M 4	45,0	100	19,40
M 4	50,0	100	21,32
M 5	30,0	100	20,08
M 5	35,0	100	24,04

d mm	l mm	Inhalt Stck	€ 100 Stck
M 5	40,0	100	26,88
M 5	50,0	100	31,76
M 5	60,0	50	39,36
M 6	16,0	100	47,04
M 6	20,0	100	22,24
M 6	25,0	100	25,28
M 6	30,0	100	29,32
M 6	35,0	100	33,20
M 6	40,0	100	36,60
M 6	50,0	50	44,64