

T-AV4D-F1662 L124P/35 A9 92/8 M2 LSPALMC 5098599



Produktdetails	
Produktbasisklassen	Mehrfachverriegelung
Produkt-Funktionsgruppe	Schloss - mechanisch
Produktgruppe	autoLock
Produkt	autoLock AV4D/Automatik
Produktvariante	autoLock AV4D Standard

Spezifikation	
Profilmaterial	Kunststoff, Aluminium
Öffnungsmöglichkeit	1-flügelig + 2-flügelig aktiv
Flügelalzhöhe	1.735 - 1.875 mm
Griffhöhe	1050 mm
Schlossbetätigung	AV4D/Schlüsselbetätigt
Stulpart	Flachstulp
Stulpbreite	16 mm
Stulpvariante	Variante 62
Stulpende	Eckig
Dornmaß	35 mm
Abstandsmaß	92 mm
Zylindertyp	Profilzylinder (PZ)
Drückernuss	8 mm
Drückernussausführung	Standard Drückernuss
Nebenverriegelungsart	Schwenkriegel AV4D
	Standard
Anzahl der Nebenverriegelungen	2
DIN Richtung	DIN links
Oberfläche	Matt chromatiert MC
Hauptriegel	Mit Hauptriegel
Fallenausführung	Abgeschrägte Falle 9°
Werkstoff Falle	Zink-Stahl
Türwächterfunktion	Ohne Türwächterfunktion
Zusatzschloss	Standard - Ohne
	Zusatzschloss
Befestigungsart	Standard Beschlagsschraube

Zertifizierung	
Zertifizierung SKG	SKG **
DIN 18251-3:2002-11	Klasse 4
Ift-Zertifizierung QM 342	Klasse 4
SBD/PAS24	geeignet

T-AV4D-F1662 L124P/35 A9 92/8 M2 LSPALMC 5098599

Profilsysteme


Profilhersteller

Aluprof, Alphacan, Aluplast,
Deceuninck (ehemals
Inoutic), Dimex, Funke,
Gealan, Kawneer (Alcoa),
PlusTec, Pural, Rehau,
Roplasto, Salamander,
Schüco, Trocal (Profine
GmbH), Veka

The technical drawing illustrates a double-sided wall bracket designed for mounting a television or monitor. It features two identical brackets mounted on opposite sides of a central vertical support plate. The overall width of the assembly is 180 mm, while the total height is 1050 mm. Key dimensions include a bracket width of 44 mm, a mounting hole offset of 56.5 mm from the edge, and a central panel width of 123 mm. The distance between the centers of the two brackets is 770.5 mm. The drawing also shows various internal components like screws, washers, and a central control unit labeled 'D'. A note at the bottom right indicates 'G = 1050'.

3/7

T-AV4D-F1662 L124P/35 A9 92/8 M2 LSPALMC 5098599

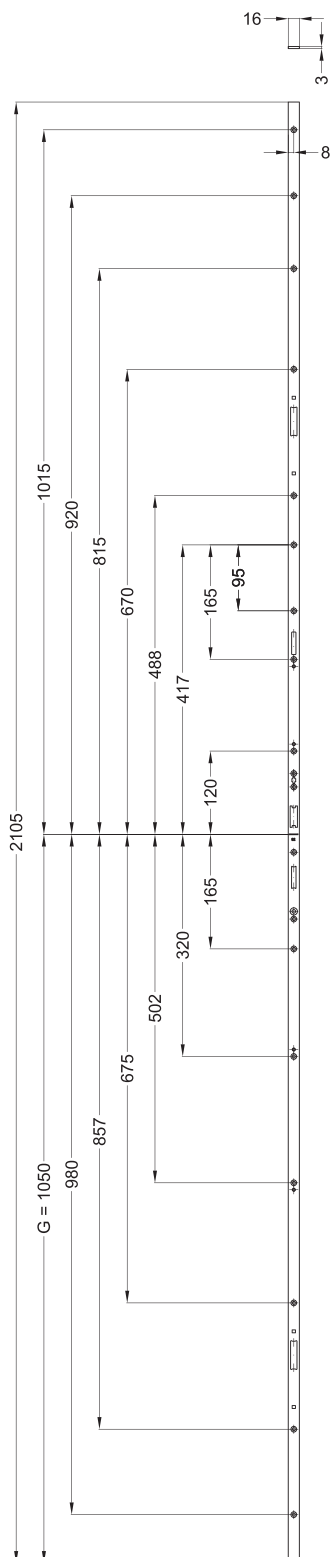


Schraubmaße


G = Griffhöhe

T-AV4D-F1662 L124P/35 A9 92/8 M2 LSPALMC 5098599

Ansichten

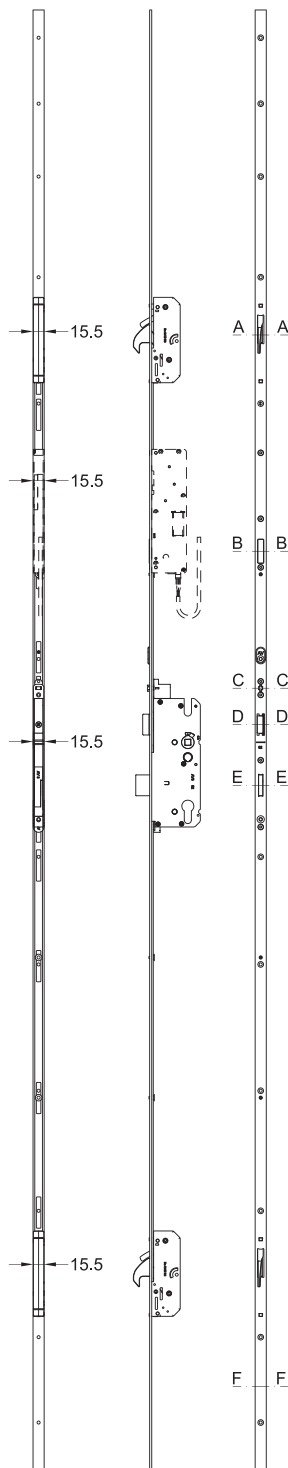

T-AV4D-F1662 L124P/35 A9 92/8 M2 LSPALMC 5098599

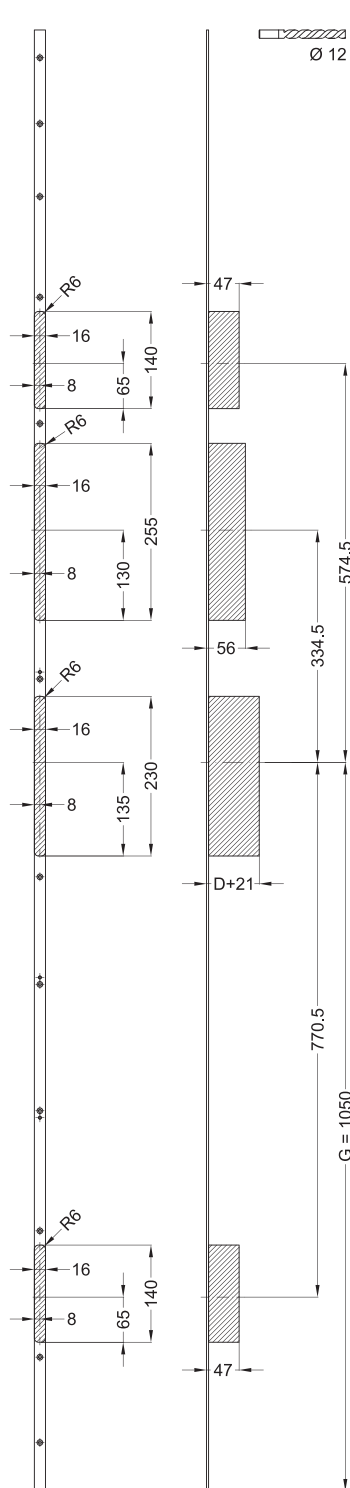


Fräsmaße

D = Dornmaß

G = Griffhöhe


T-AV4D-F1662 L124P/35 A9 92/8 M2 LSPALMC 5098599




A - A

Einbaulage


D = Dornmaß




B - B




C - C



D - D



E - E



F - F