

T-AV4D-FW2060 L124/45 A9 92/8 M2 LS MC

5100002



Produktdetails	
Produktbasisklassen	Mehrfachverriegelung
Produkt-Funktionsgruppe	Schloss - mechanisch
Produktgruppe	autoLock
Produkt	autoLock AV4D/Automatik
Produktvariante	autoLock AV4D Standard

Spezifikation	
Profilmaterial	Kunststoff
Öffnungsmöglichkeit	1-flügelig + 2-flügelig aktiv
Flügelalzhöhe	1.875 - 2.230 mm
Griffhöhe	1050 mm
Schlossbetätigung	AV4D/Schlüsselbetätigt
Stulpart	Flachstulp
Stulpbreite	20 mm
Stulpvariante	Variante 60
Stulpende	Eckig
Dornmaß	45 mm
Abstandsmaß	92 mm
Zylindertyp	Profilzylinder (PZ)
Drückernuss	8 mm
Drückernussausführung	Standard Drückernuss
Nebenverriegelungsart	Schwenkriegel AV4D
	Standard
Anzahl der Nebenverriegelungen	2
DIN Richtung	DIN links
Oberfläche	Matt chromatiert MC
Hauptriegel	Mit Hauptriegel
Fallenausführung	Abgeschrägte Falle 9°
Werkstoff Falle	Zink-Stahl
Türwächterfunktion	Mit Türwächterfunktion
Zusatzschloss	Standard - Ohne
	Zusatzschloss
Befestigungsart	Standard Beschlagsschraube

Zertifizierung	
Zertifizierung SKG	SKG **
DIN 18251-3:2002-11	Klasse 4
Ift-Zertifizierung QM 342	Klasse 4
SBD/PAS24	geeignet

T-AV4D-FW2060 L124/45 A9 92/8 M2 LS MC 5100002


Profilsysteme

Profilhersteller

KBE (Profine GmbH),
Kömmerling, PlusTec,
Salamander, Trocal (Profine
GmbH)

T-AV4D-FW2060 L124/45 A9 92/8 M2 LS MC

5100002

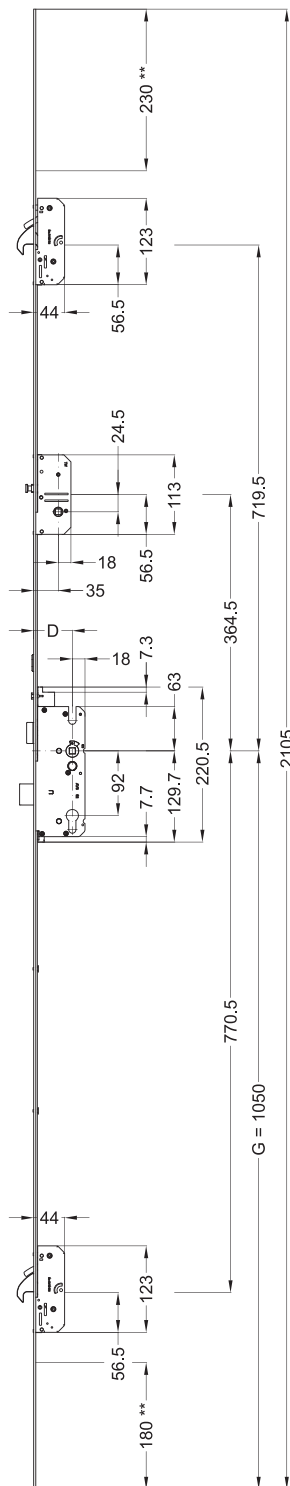

Die folgenden Zeichnungen zeigen die Ausführung in DIN rechts. Die Variante in DIN links ist spiegelbildlich zu betrachten.

Allgemeine Vermaßung

D = Dornmaß

G = Griffhöhe

(** = Ablängbereich)

Angaben, die in Klammern gesetzt sind, werden nur bei einzelnen Mehrfachverriegelungen verwendet.

Technical drawing of a door with a width of 1050 mm. The drawing shows the door's profile and the locations of various hardware components. The dimensions are as follows:


- Overall width: 1050 mm
- Distance from the left edge to the first handle: 980 mm
- Distance from the left edge to the first lock: 857 mm
- Distance from the left edge to the first hinge: 675 mm
- Distance from the left edge to the first latch: 502 mm
- Distance from the left edge to the first handle: 320 mm
- Distance from the left edge to the first lock: 165 mm
- Distance from the left edge to the first hinge: 120 mm
- Distance from the left edge to the first latch: 278 mm
- Distance from the left edge to the first handle: 460 mm
- Distance from the left edge to the first lock: 633 mm
- Distance from the left edge to the first hinge: 815 mm
- Distance from the left edge to the first latch: 920 mm
- Distance from the left edge to the first handle: 1015 mm
- Distance from the left edge to the first lock: 1050 mm

The drawing also shows the locations of the handle, lock, hinge, and latch components. The handle is located at the top of the door, the lock is located on the right side, the hinge is located on the left side, and the latch is located on the right side. The drawing is a technical drawing of a door with a width of 1050 mm.

G = Griffhöhe


T-AV4D-FW2060 L124/45 A9 92/8 M2 LS MC 5100002

Ansichten

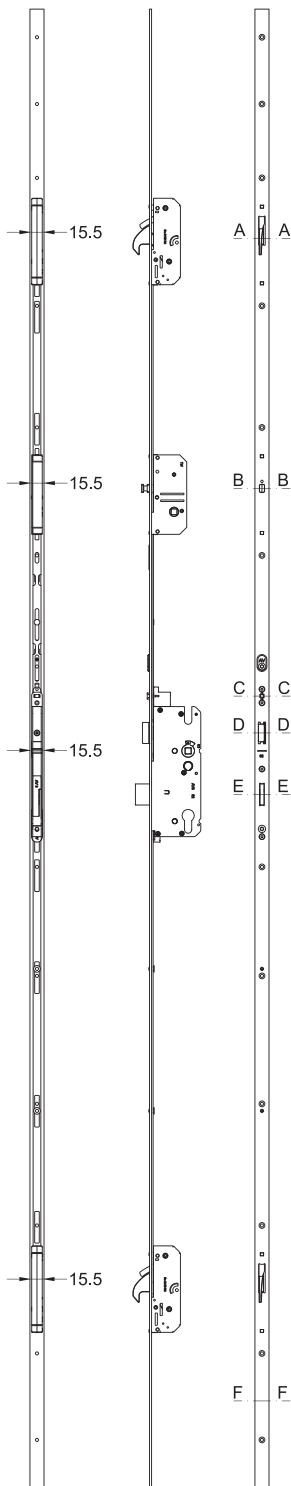

G = Griffhöhe


T-AV4D-FW2060 L124/45 A9 92/8 M2 LS MC 5100002




A - A

Einbaulage


D = Dornmaß




B - B




C - C



D - D



E - E



F - F