

T-AV4D-F2460 L124/45 A9 92/8 M4 RS MC

5103072



Produktdetails	
Produktbasisklassen	Mehrfachverriegelung
Produkt-Funktionsgruppe	Schloss - mechanisch
Produktgruppe	autoLock
Produkt	autoLock AV4D/Automatik
Produktvariante	autoLock AV4D Standard

Spezifikation	
Profilmaterial	Kunststoff, Aluminium
Öffnungsmöglichkeit	1-flügelig + 2-flügelig aktiv
Flügelalzhöhe	1.875 - 2.230 mm
Griffhöhe	1050 mm
Schlossbetätigung	AV4D/Schlüsselbetätigt
Stulpart	Flachstulp
Stulpbreite	24 mm
Stulpvariante	Variante 60
Stulpende	Eckig
Dornmaß	45 mm
Abstandsmaß	92 mm
Zylindertyp	Profilzylinder (PZ)
Drückernuss	8 mm
Drückernussausführung	Standard Drückernuss
Nebenverriegelungsart	Schwenkriegel AV4D
	Standard
Anzahl der Nebenverriegelungen	4
DIN Richtung	DIN rechts
Oberfläche	Matt chromatiert MC
Hauptriegel	Mit Hauptriegel
Fallenausführung	Abgeschrägte Falle 9°
Werkstoff Falle	Zink-Stahl
Türwächterfunktion	Ohne Türwächterfunktion
Zusatzschloss	Standard - Ohne
	Zusatzschloss
Befestigungsart	Standard Beschlagsschraube

Zertifizierung	
Zertifizierung SKG	SKG **
DIN 18251-3:2002-11	Klasse 4
Ift-Zertifizierung QM 342	Klasse 4
SBD/PAS24	geeignet

T-AV4D-F2460 L124/45 A9 92/8 M4 RS MC 5103072

Profilsysteme


Profilhersteller

Alcoa (Kawneer), Aluplast,
Deceuninck (ehemals
Inoutic), Gealan, Rehau,
Schüco, Wicona

Technical drawing of a 4-bay assembly line layout. The layout shows four workstations along a horizontal line. Each workstation has a width of 123 units. The distance between the centers of the workstations is 230 units. The total width of the layout is 180 units. The total length of the layout is 2105 units. The layout includes dimensions for the workstations, the distance between them, and the total length. The layout is labeled with 'G = 1050' and '2105'.

3/7

T-AV4D-F2460 L124/45 A9 92/8 M4 RS MC 5103072

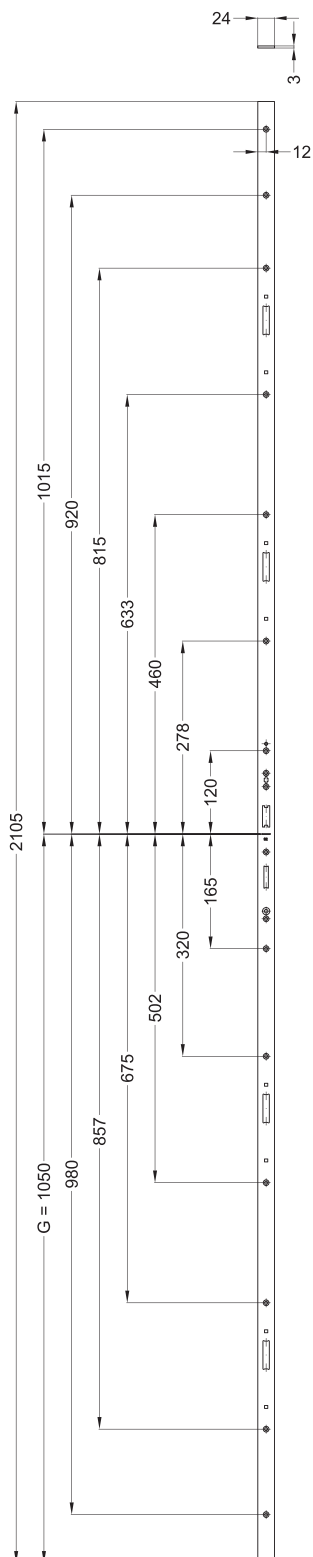


Schraubmaße

G = Griffhöhe


T-AV4D-F2460 L124/45 A9 92/8 M4 RS MC 5103072

Ansichten

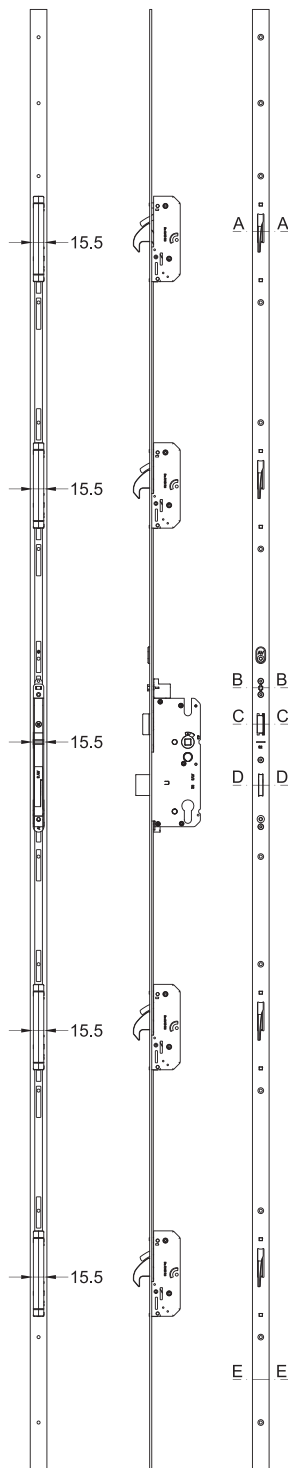

T-AV4D-F2460 L124/45 A9 92/8 M4 RS MC

5103072

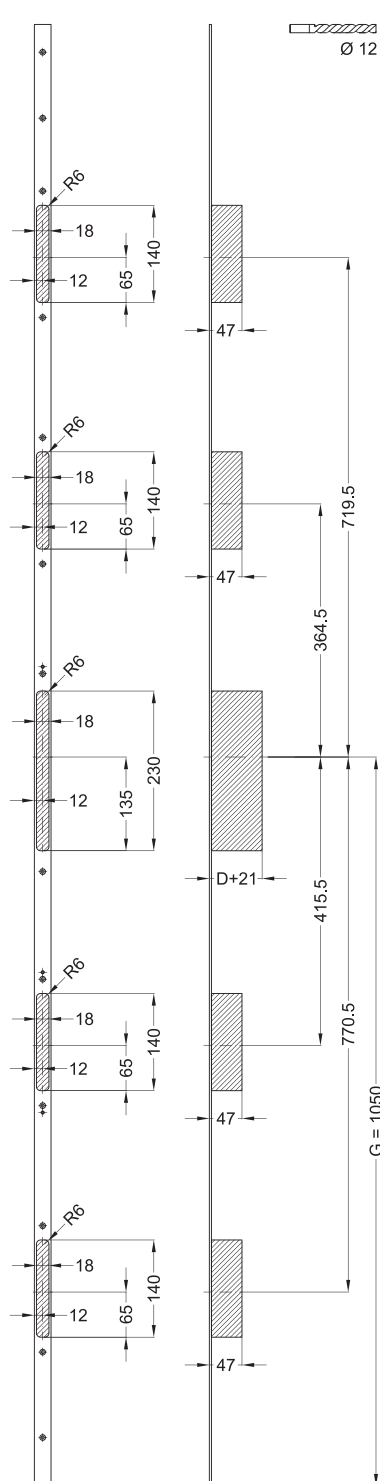


Fräsmaße

D = Dornmaß

G = Griffhöhe


T-AV4D-F2460 L124/45 A9 92/8 M4 RS MC 5103072




A - A

Einbaulage


D = Dornmaß




B - B



C - C



D - D



E - E