

T-AP179AV4DORKGB1U2471L108P/3592/9M2RSMC 5103649



Produktdetails

Produktbasisklassen	Mehrfachverriegelung
Produkt-Funktionsgruppe	Schloss - mechanisch
Produktgruppe	panicLock
Produkt	panicLock AV4D/Automatik Panik
Produktvariante	panicLock AP EN179 AV4D OR KG

Spezifikation

Profilmaterial	Aluminium
Öffnungsmöglichkeit	1-flügelig aktiv
Flügelfalzhöhe	1.875 - 2.230 mm
Griffhöhe	1050 mm
Schlossbetätigung	AV4D OR/Schlüsselbetätigt
Panikfunktion	Umschaltfunktion B
Stulpart	U-Profil
Stulpbreite	24 mm
Stulpvariante	Variante 71
Stulpende	Eckig
Dornmaß	35 mm
Abstandsmaß	92 mm
Zylindertyp	Profilzylinder (PZ)
Drückernuss	9 mm
Drückernussausführung	Standard Drückernuss
Nebenverriegelungsart	Schwenkriegel AV4D Standard
Anzahl der Nebenverriegelungen	2
DIN Richtung	DIN rechts
Oberfläche	Matt chromatiert MC
Hauptriegel	Ohne Hauptriegel
Fallenausführung	Abgeschrägte Falle 9°
Werkstoff Falle	Zink-Stahl
Türwächterfunktion	Ohne Türwächterfunktion
Zusatzschloss	AP4B - Zusatzschloss
Befestigungsart	Standard Beschlagsschraube

Zertifizierung

Zertifizierung SKG	SKG **
DIN EN 179:2008-04	37601342AB/D
DIN 18251-3:2002-11	Klasse 4
Ift-Zertifizierung QM 342	Klasse 4
SBD/PAS24	geeignet

T-AP179AV4DORKGB1U2471L108P/3592/9M2RSMC 5103649

Profilsysteme


Profilhersteller

Aluprof, Esco, EurAL, Forster,
Gutman, Heroal, Hueck,
Raico, Reynaers, RP Technik,
Sepalumic, Technal

Technical drawing of a three-phase motor with dimensions in mm. The drawing shows the motor from the front and side views. Key dimensions include: total length 1800 mm, mounting bracket width 370 mm, mounting bracket height 123 mm, mounting bracket offset 56.5 mm, mounting bracket distance 43 mm, mounting bracket offset 56.5 mm, mounting bracket distance 123 mm, mounting bracket offset 92 mm, mounting bracket distance 122 mm, mounting bracket offset 185 mm, mounting bracket distance 17.5 mm, mounting bracket offset 18 mm, mounting bracket distance 7.3 mm, mounting bracket offset 63 mm, mounting bracket distance 220.5 mm, mounting bracket offset 92 mm, mounting bracket distance 7.7 mm, mounting bracket offset 129.7 mm, mounting bracket distance 63 mm, mounting bracket offset 220.5 mm, mounting bracket distance 445.5 mm, mounting bracket offset 770.5 mm, mounting bracket distance 180 mm, mounting bracket offset 52 mm, mounting bracket distance 90.5 mm, mounting bracket offset 178 mm, mounting bracket distance 43 mm, mounting bracket offset 123 mm, mounting bracket distance 56.5 mm, mounting bracket offset 180 mm. The total length is G = 1050 mm.


3/7

T-AP179AV4DORKGB1U2471L108P/3592/9M2RSMC 5103649

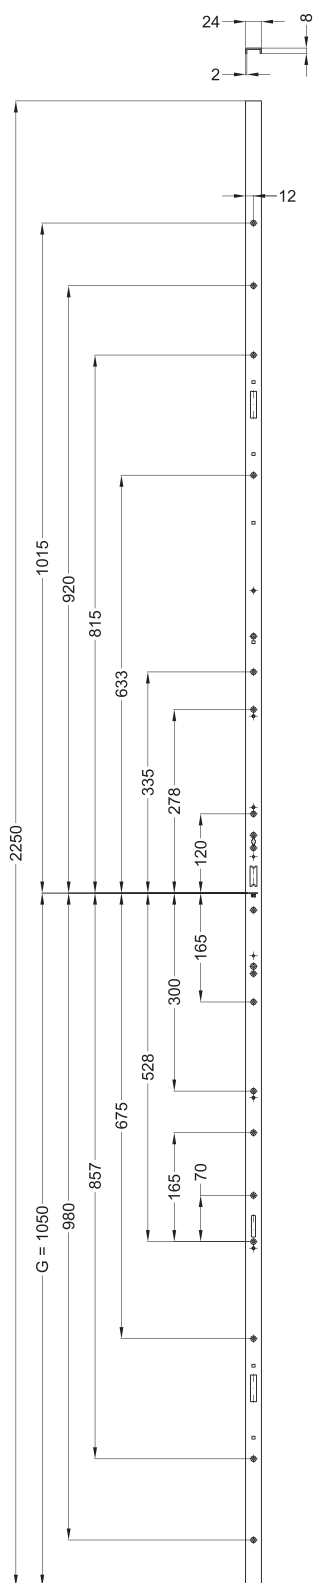


T-AP179AV4DORKGB1U2471L108P/3592/9M2RSMC 5103649

Ansichten

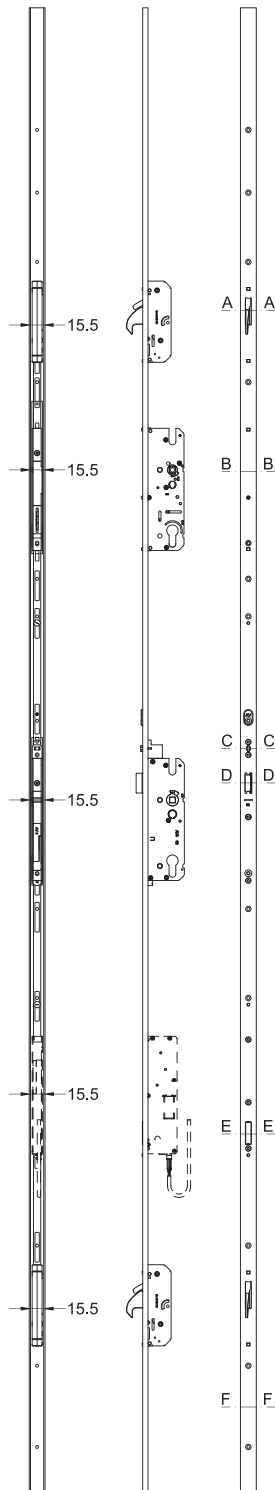

T-AP179AV4DORKGB1U2471L108P/3592/9M2RSMC 5103649

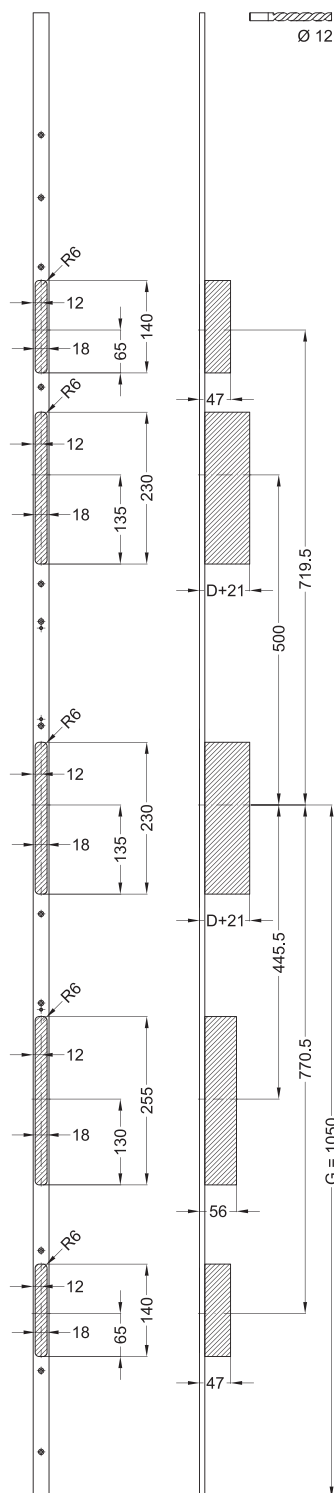

T-AP179AV4DORKGB1U2471L108P/3592/9M2RSMC 5103649

Einbaulage

D = Dornmaß

