




DOOR CLOSER 100-934

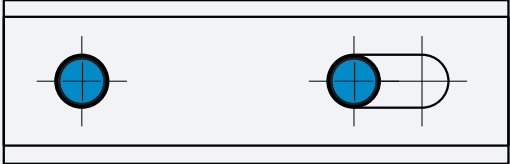

SCALE 1 : 1

Regular arm (Pull side Fixing) -
Right Hand Door

Top of the door


SPRING POWER ADJUSTING CHART		
EN	Cycle	Max. Opening angle
2	-4	180°
3	0	180°
4	+4	180°
5	+8	180°
6	+12	180°

NOTED: The closers preset EN3
when out of factory

	Union Euro Trading GmbH Hermann-Buck-Weg 11-17, 22309 Hamburg, Germany	21							
		4	8	<table border="1"><tr><td>6</td><td>2</td></tr></table>	6	2	1 ^a	1	3
		6	2						
Dangerous Substances: None									

Remark "a": Suitable for use on single leaf single swing wooden composite fire door. The fire resistance test was conducted with 806 mm width x 2048 mm height fire door in regular arm installation.

100-934

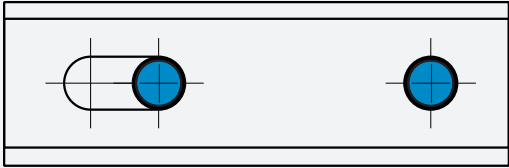

SCALE 1 : 1

Regular arm (Pull side Fixing) -
Left Hand Door

Top of the door

100-934

	Union Euro Trading GmbH Hermann-Buck-Weg 11-17, 22309 Hamburg, Germany	21							
		4	8	<table><tr><td>6</td><td>2</td></tr></table>	6	2	1 ^a	1	3
		6	2						
Dangerous Substances: None									


Remark "a": Suitable for use on single leaf single swing wooden composite fire door. The fire resistance test was conducted with 806 mm width x 2048 mm height fire door in regular arm installation.

SPRING POWER ADJUSTING CHART		
EN	Cycle	Max. Opening angle
2	-4	180°
3	0	180°
4	+4	180°
5	+8	180°
6	+12	180°

NOTED: The closers preset EN3
when out of factory



DOOR CLOSER 100-934

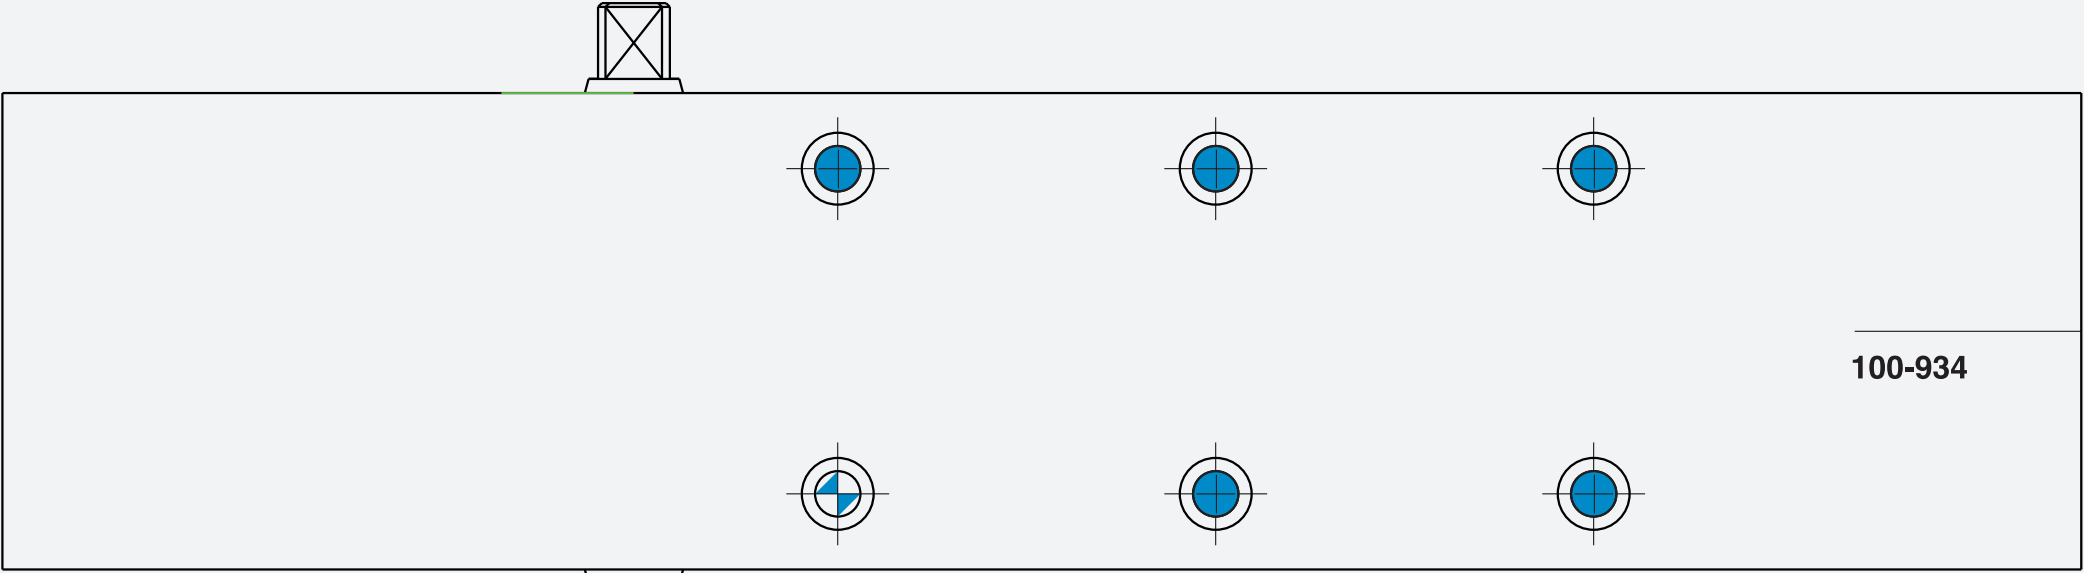

100-934




Top of the door

	Union Euro Trading GmbH Hermann-Buck-Weg 11-17, 22309 Hamburg, Germany	21							
		4	8	<table border="1"><tr><td>6</td></tr><tr><td>2</td></tr></table>	6	2	1 ^a	1	3
		6							
2									
Dangerous Substances: None									

Remark "a": Suitable for use on single leaf single swing wooden composite fire door. The fire resistance test was conducted with 806 mm width x 2048 mm height fire door in regular arm installation.

SPRING POWER ADJUSTING CHART		
EN	Cycle	Max. Opening angle
2	-4	180°
3	0	180°
4	+4	180°
5	+8	180°
6	+12	180°

NOTED: The closers preset EN3 when out of factory

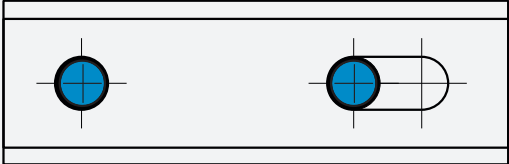

SCALE 1 : 1


Regular arm (Pull side Fixing) -
Right Hand Door

SCALE 1 : 1

Regular arm (Pull side Fixing) –
Left Hand Door

SPRING POWER ADJUSTING CHART		
EN	Cycle	Max. Opening angle
2	-4	180°
3	0	180°
4	+4	180°
5	+8	180°
6	+12	180°


NOTED: The closers preset EN3 when out of factory

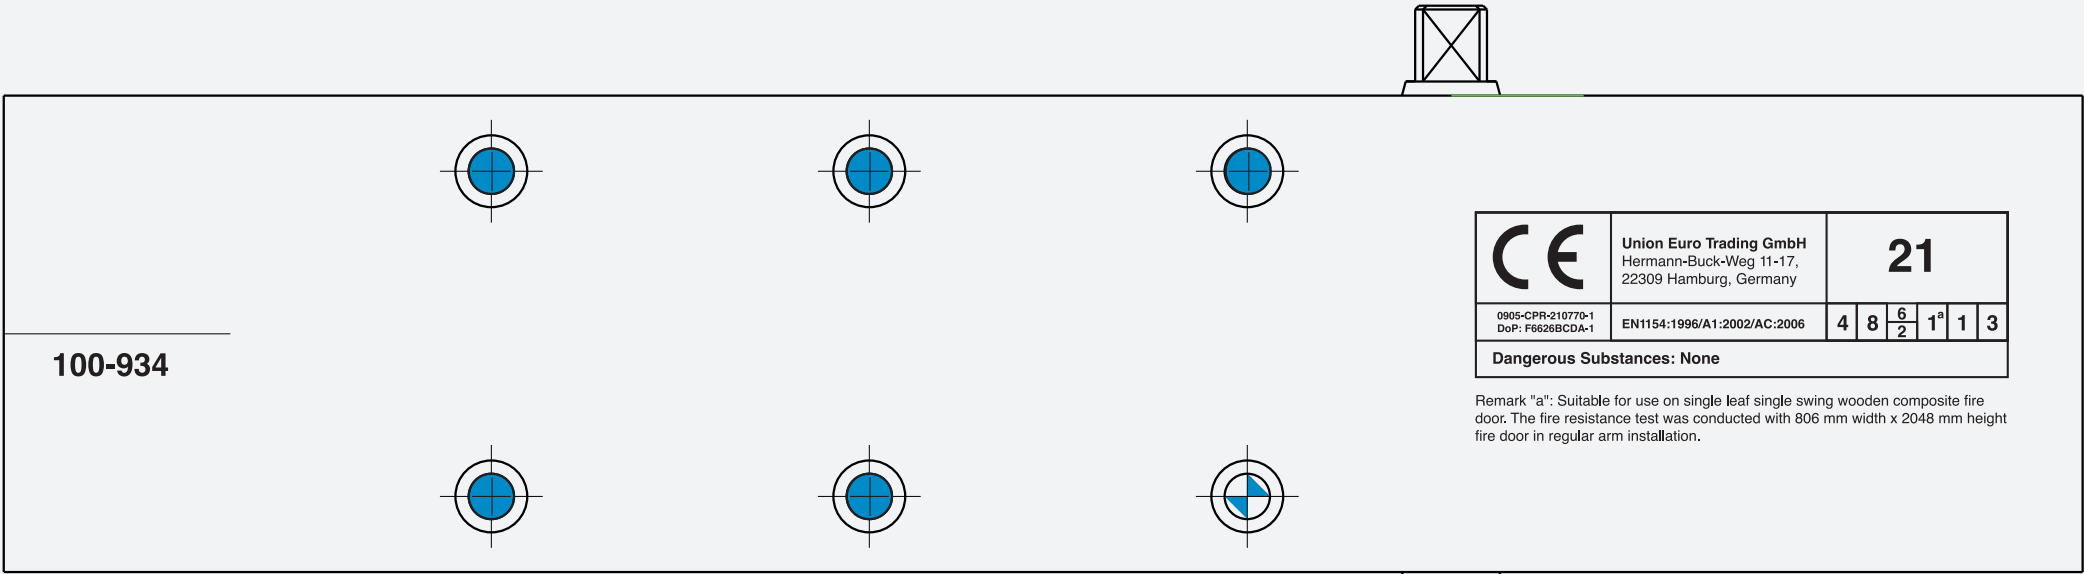

100-934

	Union Euro Trading GmbH Hermann-Buck-Weg 11-17, 22309 Hamburg, Germany	21							
		4	8	<table border="1"><tr><td>6</td></tr><tr><td>2</td></tr></table>	6	2	1 ^a	1	3
		6							
2									
Dangerous Substances: None									

Remark "a": Suitable for use on single leaf single swing wooden composite fire door. The fire resistance test was conducted with 806 mm width x 2048 mm height fire door in regular arm installation.

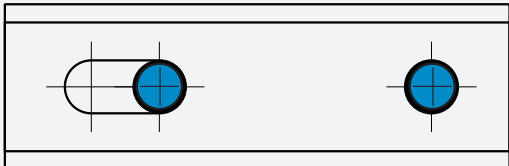

Top of the door



Hinge